

SY-2830A-11 AMCOM III THREE-DIVER RECHARGEABLE BASIC PORTABLE COMMUNICATOR

SY-2830A-11 AMCOM III THREE-DIVER RECHARGEABLE PORTABLE COMMUNICATOR WITH OUTDOOR AC POWER MODULE AND INTERNATIONAL LOCKING POWER CORD



NEWLY DESIGNED ENHANCEMENTS:

High Audio Fidelity

Ultra-low noise circuit combined with noise suppression circuitry produces crystal clear speech. Automatic gain adjustment

will guard audio signal from distortion, enhance speaker protection and audio quality. Increases band width 47%.

Extended Battery Operation Time

Audio amplifier card deploys the state-of-the-art Class-D digital audio power amplifier. Has very low power dissipation, produces less heat, and extends battery life up to 32%.

Flexible Gain Settings

The audio amplifier card has adjustable gain settings to accommodate different communication applications and environments.

Ultra-Low Electromagnetic Interference (EMI)

EMI is achieved through spread-spectrum and de-phase control techniques providing for optimum integration with diving systems.

Outdoor Rated AC Power Module


Weather resistant, IP65 rated AC power entry module accommodates country specific AC power cords.

Country Specific V-Lock AC Power Cord

At time of order, simply choose the IP54 rated Locking AC power cord you need.

FEATURES:

- Separate channels and volume controls for each diver and tender to accommodate individual earphone and microphone adjustments, equipment variations and individual comfort levels.
- Divers' umbilicals can be set to 4-wire mode (full duplex) or 2-wire mode (push-to-talk) or any combination of the two modes for any diver.
- Ability to use both dynamic and pre-amplified diver microphones with a unique circuit that detects microphone type and automatically adjusts volume levels.
- Weatherproof push-to-talk microphone for better voice intelligibility topside. For optimum clarity, see Tech Note (below) for other recommended equipment.
- Internal charger allows for simultaneous charging and operation of the unit while protecting the rechargeable battery from being over-charged. Automatically supplies power to the audio amplifier when AC power is disconnected to allow for continued operation.

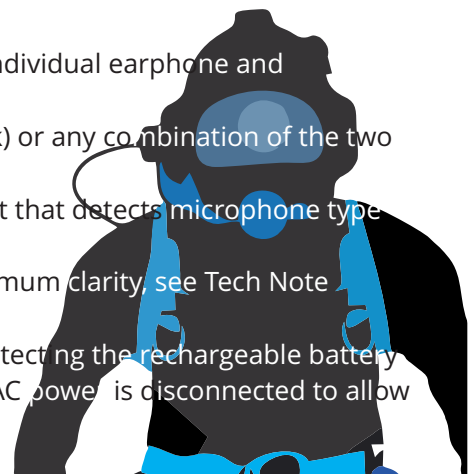

SY-2830A-11 AMCOM III THREE-DIVER RECHARGEABLE BASIC PORTABLE COMMUNICATOR

SPECIFICATIONS:

- Input Impedance (Each Input): 250 Ohms
- Frequency Response: 300 - 10000 Hz
- Common Mode Rejection: 40 dB Minimum
- Current Drain Maximum Full Volume: 3 Amps
- Minimum Quiescent: 0.190 Amps
- Output Impedance: 4 Ohm
- Power Supply Voltage: 12 VDC Nominal (9 Volts Minimum - 16 Volts Maximum)
- AC Power Operating Range: 90-264 VAC, 50-60 Hz
- Sensitivity (Input): 0.5 mV
- Output Power (RMS @ 4 Ohm Load, 12 VDC): 10 Watts Audio
- Battery Life: 41 hours
- Dimensions: 10 in. H x 9 in. W x 14.5 in. L (25.4 cm x 22.9 cm x 36.8 cm)
- Weight: 17.05 Lbs. (7.73 Kg)

INCLUDED WITH COMMUNICATOR:

SY-2830A-11 AMCOM III Two-Diver Rechargeable Basic Portable Communicator with Outdoor Power Module and International Locking Power Cord includes:

- (1) SY-2405-28 Amron Hand-Held Push-to-Talk Microphone
- (1) SY-2890-05 Amron 12 VDC Sealed Lead Acid Gel-Cell Rechargeable Battery with Slide terminals
- (1) SY-283XA-UM Amron Three-Diver Portable Communicator User Manual

AVAILABLE OPTIONS:


- SY-2460SM-28 Amron Single Muff Operator Headset with Boom Mic and Dual Banana Plugs
- SY-2401-28 Amron Deluxe Headset with Boom Mic
- SY-2822-28 Amron Remote Walk-and-Talk (4-wire mode)
- SY-2821-28 Amron Remote Walk-and-Talk (2-wire mode)

TECH NOTE:




All communicators will inherently transfer topside noise to the divers when the tender speaks directly into the communicator's panel speaker. To eliminate background noise at the surface, use the 2405-28 Push-to-Talk Microphone, included with this model. For optimum communications, we recommend purchasing the 2401-28 Deluxe Headset with Boom Mic, topside. For tender mobility, use the 2401-28 Deluxe Headset with Boom Mic along with the 2822-28 Remote Walk-and-Talk (4-wire mode) or the 2821-28 Remote Walk-and-Talk (2-wire mode). For wireless tender communications, order the 2830A-03 Three-Diver Deluxe Portable Communicator with Wireless Tender.

SY-2830A-11 AMCOM III THREE-DIVER RECHARGEABLE BASIC PORTABLE COMMUNICATOR

Contact us

 29th Street, Amman Road, Behind Al Huraiz Est. For Industry,
Al Qusais, Industrial Area – 1,
Dubai, United Arab Emirates

 Tel : 009714 2580533 
 Fax : 042516664 
 UAE : 00971505648178 
 UK : 00447951966260 

 Website : www.synergyequipment.com
 Email : ram@synergyequipment.com
 For Sale : info@synergyequipment.com

