


ANDEROL-555 SYNTHETIC COMPRESSOR LUBRICANT



ANDEROL 555 is an ISO 100 diester based synthetic compressor lubricant specifically designed to provide longterm lubrication in process gas compressors.

ANDEROL 555 SALES SPECIFICATIONS					
PROPERTY	TEST METHOD	MIN	MAX	TYPICAL RESULTS	
Anderol 555 Viscosity @ 40°C, cSt	ASTM D-445	90.0	110	97	
Anderol 555 Viscosity @ 100°C, cSt	ASTM D-445		N	9.3	
Anderol 555 Pour Point, °C	ASTM D-97	2	-30	-35	
Anderol 555 Flash Point, °C	ASTM D-92	230	s	274	
Anderol 555 Specific Gravity, 15.6°C	ASTM D-4052B	0.95	0.97	0.96	

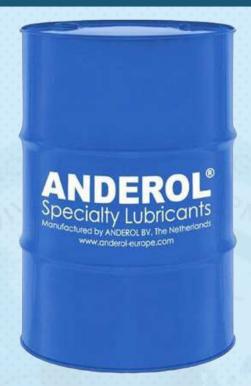













PRODUCT CERTIFICATE EC Attestation of Conformity

In Compliance with following Directives:
Machinery Directive 2006/42/EC

Low Voltage Directive 2014/35/EU

Pressure Equipment Directive

UK CA













ANDEROL-555 SYNTHETIC COMPRESSOR LUBRICANT

ANDEROL 555 ADDITIONAL INFORMATION					
Anderol 555 Autoignition Temperature, °C	ASTM E-659	410			
Anderol 555 Conradson Carbon Residue, %	ASTM D-189	0.02			
Anderol 555 Evaporation, 22 hrs @ 99°C, %	ASTM D-972	<1.0			
Anderol 555 Copper Strip Corrosion, 3 hrs @ 100°C	ASTM D-130	1A			
Anderol 555 Demulsibility @ 54°C, ml oil/water/emulsion (min.)	ASTM D-1401	39/38/3 (<60)			
Anderol 555 Four-Ball Wear, 1200 rpm, 75°C, 40 kg, 1 hr, mm	ASTM D-2266	0.8			



ANDEROL-555 SYNTHETIC COMPRESSOR LUBRICANT

Contact us

29th Street, Amman Road, Behind Al Huraiz Est. For Industry, Al Qusais, Industrial Area - 1, **Dubai, United Arab Emirates**

: 009714 2580533 Fax 009714 2580534 UAE : 00971505648178 UK : 00447951966260

Website: www.synergyequipment.com : ram@synergyequipment.com Email For Sale: info@synergyequipment.com

















PRODUCT CERTIFICATE **EC Attestation of Conformity**

In Compliance with following Directives: Machinery Directive 2006/42/EC

Low Voltage Directive 2014/35/EU

Pressure Equipment Directive



