

**THREE DIVER SCUBA REPLACEMENT PACKAGE (SRP) WITH STEEL CYLINDERS**  
**# SY-3DAP-D040-SC-SRP-X-XXX**




**PART NO : SY-3DAP-D040-SC-SRP-X-XXX**

**Design**

- All Stainless Steel 316 construction, four diagonal lifting points with ringed pad eyes and fork lift slots.
- Dedicated lifting slings, certified, provided with SRP
- 6 X 50 LTR X 200 BAR Steel cylinders
- State of the art dive panels, fully engraved, color coded per diver, built into a waterproof, dust proof, unbreakable Pelican case
- Built to utilize 3 x 100 mtr / 150 mtr / 200 mtr diving umbilicals.
- Various options – Inbuilt radio, inbuilt CCTV systems for diver 1, diver 2, diver 3
- 12v battery pack to run the video systems
- High pressure air hoses with ss fittings from cylinders to dive panel
- Bespoke panels can also be supplied, with client company logo, asset number etc printed on the system
- The system is supplied with complete certification package as per IMCA guidelines and class witness certification

**DESIGN for Mobile/Portable Surface Supplied Systems IMCA D040**

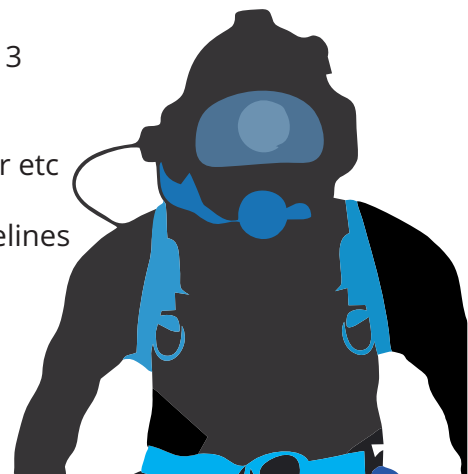

**THREE DIVER SCUBA REPLACEMENT PACKAGE (SRP) WITH STEEL CYLINDERS**  
**# SY-3DAP-D040-SC-SRP-X-XXX**



**TECHNICAL DATA SHEET:**

**Frame Dimensions**

Umbilical Hook	55 cm (550mm)
Construction	316 Stainless Steel (mirror finish)
SRP complete unit	2200mm (L) x 1700mm (H) x 1350mm (W)
Ringed Pad Eye	100mm (H) x 100mm(W) x 30mm (T) (with ring)
Pad eye design	DNV 2.7-1

**Optional Extras**

Wheels	Bolted wheels for easy transport
DC power	Battery pack 12v complete with fast charger in water proof junction box and battery leads

**THREE DIVER PORTABLE PANEL - SY-3DAP-D040-X-XXX**



**PART NO : SY-3DAP-D040-R-2DV**

Three diver panel with radio and diver 1 / diver 2 cctv system

**THREE DIVER PORTABLE PANEL - SY-3DAP-D040-X-XXX**



**PART NO : SY-3DAP-D040-R-1DV**

Three diver panel with radio and diver 1 cctv

**PART NO : SY-3DAP-D040-R**

Three diver panel with radio




**THREE DIVER PORTABLE PANEL - SY-3DAP-D040-X-XXX**

DIVING PANEL WITH D1/D2/D3 INLET FITTINGS (AIR SUPPLIES HP/LP) ON LEFT SIDE AND D1/D2/D3 OUTLET FITTINGS (TO DIVER) ON RIGHT SIDE



DIVING PANEL WITH D1/D2/D3 INLET (HP/LP) AND OUTLET FITTINGS (TO DIVER) FROM THE BACKSIDE OF THE PANEL

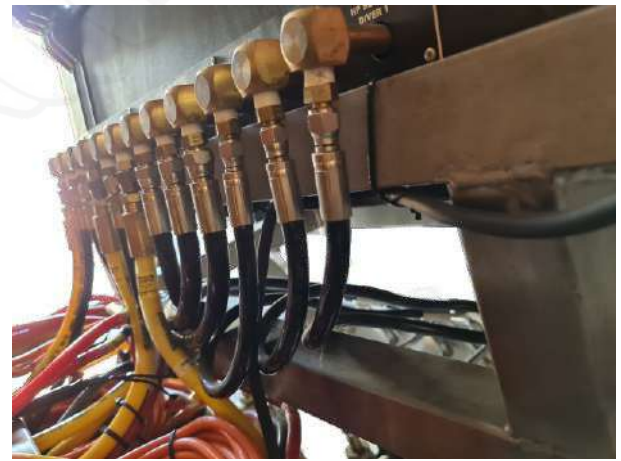

## THREE DIVER PORTABLE PANEL - SY-3DAP-D040-X-XXX

### Information Two Diver Panel

Case	Model 1650, Black, Interior (28.57" L x 17.52" W x 10.65" H), with wheels and handle, water, rust and dust proof), Pelican USA <b>Exterior dimensions:</b> 80.14 x 52.1 x 31.67cm (31.55" x 20.51" x 12.47") <b>Interior dimensions:</b> 72.16 x 44.2 x 27.03cm (28.41" x 17.40" x 10.64") <b>Weight without foam:</b> 10.9kg (24.03lbs)
------	---

1 x 0-230 fsw/70 msw Depth gauge, 3.5", 0.25 % accuracy, mirror scale, with calibration point , Diver 1, Color coded <b>Green</b>
---

1 x 0-230 fsw/70 msw Depth gauge, 3.5", 0.25 % accuracy, mirror scale, with calibration point, Diver 2, Color coded <b>Blue</b>
---

1 x 0-230 fsw/70 msw Depth gauge, 3.5", 0.25 % accuracy, mirror scale, with calibration point, Diver 3, Color coded <b>Red</b>
--

Air Supplies	HP - 3 independent supplies, one per diver, LP – 3 independent supplies, one per diver
Communication	Amron 2830A-11 Three diver radio with ac/dc power supply
Regulator	1 x per diver, suitable for breathing air, Inlet : 6000 psi, outlet : 400 psi
Relief valves	0-250 psi on regulated diver supply line, 100 psi on pneumo gauges

### Air supply ports:


Option 1	All fittings provided on both sides of case – Left side all inlet fittings for hp air, lp air, right side divers air supply and pneumo fittings.
Option 2	All fittings provided from behind the panel for inlets and outlets
Calibration	Inbuilt calibration points for pneumo gauges

### Optional :

CCTV	Can be provided for both diver 1 and diver 2
Monitor	TFT 15.5" (splitter will be provided if both diver CCTV options are required)
Surface control unit	All touch button controls with backlight for low visibility operations, video and light control
Primary recording	1 TB hard drive to record all diver video simultaneously
Secondary back up recording	1 TB backup hard drive to record all diver video simultaneously

**THREE DIVER PORTABLE PANEL - SY-3DAP-D040-X-XXX**

Emergency panel provision – extra protection for diver safety

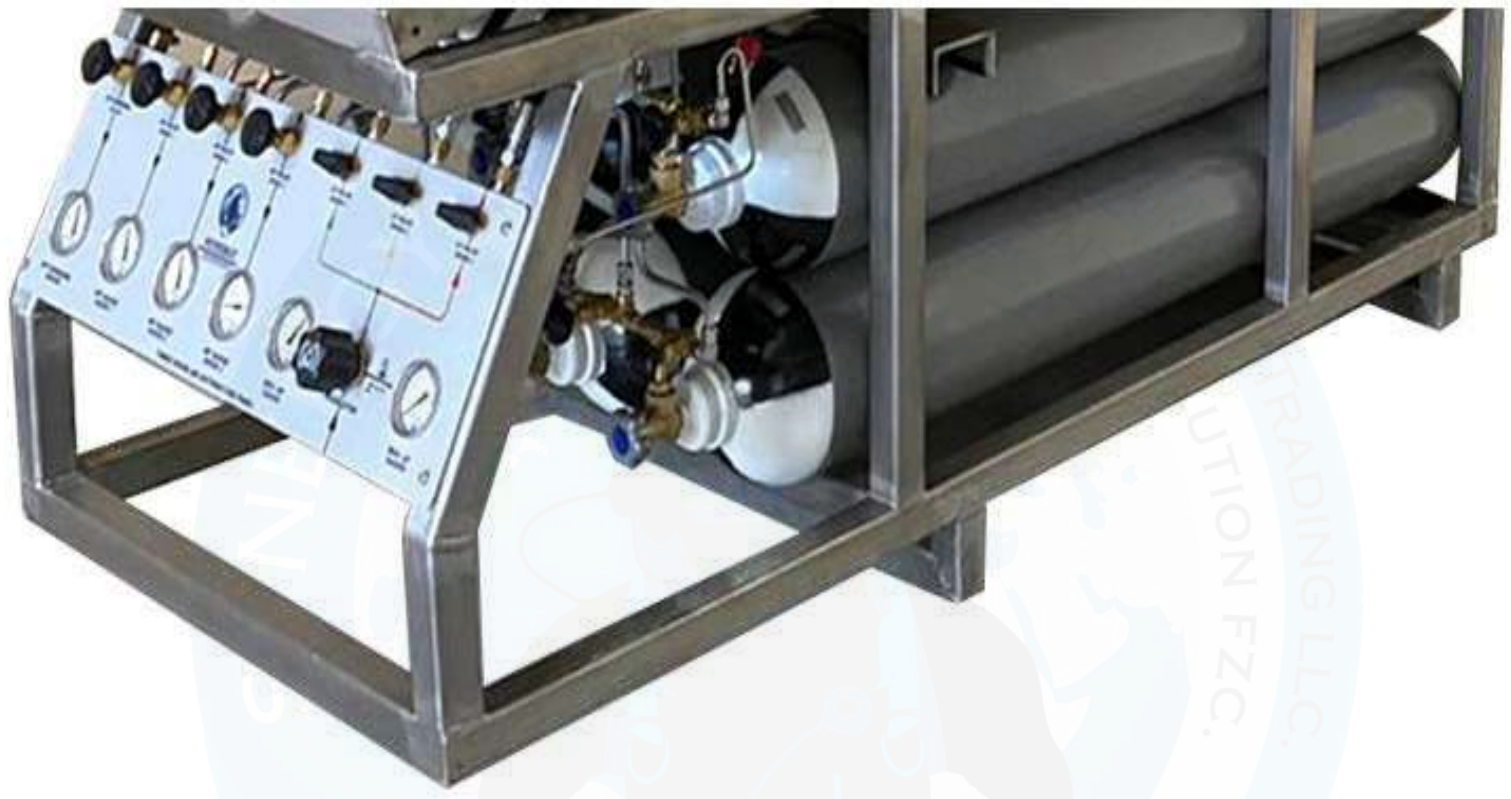

Information	Emergency Panel
Cylinder Charging	HP charging valve/Gauge
Regulator	HP regulator, inlet 6000 psi Outlet 400 psi
Supplies to Dive Panel	D1/D2/D3 HP valves/Gauges
Regulated Supply	D1/D2/D3 LP valves/Gauges
Connections	Valves/fittings/piping from cylinders to panel

## THREE DIVER SCUBA REPLACEMENT PACKAGE (SRP) WITH STEEL CYLINDERS

# SY-3DAP-D040-SC-SRP-X-XXX

### Breathing Air Cylinder Specification



Cylinder	IL1.50.229.200
Manufacturing Standard	ISO 9809-1
Dimensions	229mm OD x 1480 mm Length x 50.0 ltrs
Material	34CrMo4
Manufacturing Process	Hot Spinning of Seamless Steel Tubes
Heat Treatment	Hardened Quenched and Tempered
Working Pressure	200 bar
Hydraulic Test Pressure	300 bar
Minimum Burst Pressure	480 bar
Volumetric Capacity (nominal)	50 Litres
Nominal Gas Capacity	10 cu.m (Approx)
Cylinder Outside Diameter (+_1%)	229mm
Cylinder Length (without valve (+_20MM))	1470mm (Approx)
Tare Weight (+_5%)	54 kg (Approx)
Gas Application	Breathing Air
Neck Thread Specification	25E as per EN-629
Valve	Handwheel Operated Valve with BS3 Outlet
External Finish	Powder coated as per Gas Color Code for Breathing Air Grey (RAL 7037)



**ACCESSORIES**

**12V 75 AMPS CAR BATTERY WITH FAST BATTERY CHARGER IN WATER PROOF JUNCTION BOX PROVIDED WITH SRP**



**PART NO : SY-SRP-3DAP-D040-SC-SRP-X-XXX**

## SY-2830A-11 AMCOM III THREE-DIVER RECHARGEABLE BASIC PORTABLE COMMUNICATOR

### SY-2830A-11 AMCOM III THREE-DIVER RECHARGEABLE PORTABLE COMMUNICATOR WITH OUTDOOR AC POWER MODULE AND INTERNATIONAL LOCKING POWER CORD



#### NEWLY DESIGNED ENHANCEMENTS:

##### High Audio Fidelity

Ultra-low noise circuit combined with noise suppression circuitry produces crystal clear speech. Automatic gain adjustment

will guard audio signal from distortion, enhance speaker protection and audio quality. Increases band width 47%.

##### Extended Battery Operation Time

Audio amplifier card deploys the state-of-the-art Class-D digital audio power amplifier. Has very low power dissipation, produces less heat, and extends battery life up to 32%.

##### Flexible Gain Settings

The audio amplifier card has adjustable gain settings to accommodate different communication applications and environments.

##### Ultra-Low Electromagnetic Interference (EMI)

EMI is achieved through spread-spectrum and de-phase control techniques providing for optimum integration with diving systems.

##### Outdoor Rated AC Power Module

Weather resistant, IP65 rated AC power entry module accommodates country specific AC power cords.

##### Country Specific V-Lock AC Power Cord

At time of order, simply choose the IP54 rated Locking AC power cord you need.

#### FEATURES:

- Separate channels and volume controls for each diver and tender to accommodate individual earphone and microphone adjustments, equipment variations and individual comfort levels.
- Divers' umbilicals can be set to 4-wire mode (full duplex) or 2-wire mode (push-to-talk) or any combination of the two modes for any diver.
- Ability to use both dynamic and pre-amplified diver microphones with a unique circuit that detects microphone type and automatically adjusts volume levels.
- Weatherproof push-to-talk microphone for better voice intelligibility topside. For optimum clarity, see Tech Note (below) for other recommended equipment.
- Internal charger allows for simultaneous charging and operation of the unit while protecting the rechargeable battery from being over-charged. Automatically supplies power to the audio amplifier when AC power is disconnected to allow for continued operation.

## SY-2830A-11 AMCOM III THREE-DIVER RECHARGEABLE BASIC PORTABLE COMMUNICATOR

### SPECIFICATIONS:

- Input Impedance (Each Input): 250 Ohms
- Frequency Response: 300 - 10000 Hz
- Common Mode Rejection: 40 dB Minimum
- Current Drain Maximum Full Volume: 3 Amps
- Minimum Quiescent: 0.190 Amps
- Output Impedance: 4 Ohm
- Power Supply Voltage: 12 VDC Nominal (9 Volts Minimum - 16 Volts Maximum)
- AC Power Operating Range: 90-264 VAC, 50-60 Hz
- Sensitivity (Input): 0.5 mV
- Output Power (RMS @ 4 Ohm Load, 12 VDC): 10 Watts Audio
- Battery Life: 41 hours
- Dimensions: 10 in. H x 9 in. W x 14.5 in. L (25.4 cm x 22.9 cm x 36.8 cm)
- Weight: 17.05 Lbs. (7.73 Kg)

### INCLUDED WITH COMMUNICATOR:

SY-2830A-11 AMCOM III Two-Diver Rechargeable Basic Portable Communicator with Outdoor Power Module and International Locking Power Cord includes:

- (1) SY-2405-28 Amron Hand-Held Push-to-Talk Microphone
- (1) SY-2890-05 Amron 12 VDC Sealed Lead Acid Gel-Cell Rechargeable Battery with Slide terminals
- (1) SY-283XA-UM Amron Three-Diver Portable Communicator User Manual

### AVAILABLE OPTIONS:


- SY-2460SM-28 Amron Single Muff Operator Headset with Boom Mic and Dual Banana Plugs
- SY-2401-28 Amron Deluxe Headset with Boom Mic
- SY-2822-28 Amron Remote Walk-and-Talk (4-wire mode)
- SY-2821-28 Amron Remote Walk-and-Talk (2-wire mode)

### TECH NOTE:

All communicators will inherently transfer topside noise to the divers when the tender speaks directly into the communicator's panel speaker. To eliminate background noise at the surface, use the 2405-28 Push-to-Talk Microphone, included with this model. For optimum communications, we recommend purchasing the 2401-28 Deluxe Headset with Boom Mic, topside. For tender mobility, use the 2401-28 Deluxe Headset with Boom Mic along with the 2822-28 Remote Walk-and-Talk (4-wire mode) or the 2821-28 Remote Walk-and-Talk (2-wire mode). For wireless tender communications, order the 2830A-03 Three-Diver Deluxe Portable Communicator with Wireless Tender.

## SYNERGY SURFACE DIVING HOSES AND UMBILICALS SY-AQUAFLOW

Known worldwide for its lightweight and ultra flexible construction, Aquaflow hoses are ideal for surface demand applications. Aquaflow kink resistant construction comprises of an extruded core tube, reinforcement of high strength yarn and a bonded outer cover. Both tube and cover are extruded from high performance thermoplastic polymers which are particularly clean and free from odors often associated with conventional rubber hoses. Coupled with the wide operating temperature range this ensures breathing gas quality is maintained under all conditions from -20°C to +66°C.



Part No.	Nominal Bore		O.D.		Min. bend radius		Working pressure		Nom. burst pressure		Weight in air		Weight in sea water		Typical application
	in	mm	in	mm	in	mm	psi	bar	psi	bar	lb/ft	g/m	lb/ft	g/m	
SY-HDA0104	1/4	6.3	0.50	12.7	1.25	32	300	21	1200	84	0.078	116	-0.009	-14	Pneumo
SY-HDA0106	3/8	9.5	0.66	16.8	2	50	500	35	2000	140	0.119	177	-0.034	-50	Air/Gas
SY-HDA1108	1/2	12.7	0.83	21.0	3	76	300	25	1200	84	0.178	265	-0.054	-80	Hot water

### Aquaflow Umbilicals



Lightweight, ultra flexible and kink resistant, Aquaflow Umbilicals are ideal for breathing gas supply, comms and pneumo service for surface demand umbilicals. They can be produced in production runs up to 740 meters long and can be over extruded or braided for additional protection against abrasion and use in contaminated waters.

The unique materials and cabled "rope-like" construction combine to produce the most flexible, controlled buoyancy umbilicals available today. The umbilicals have no need

for tape, the repairs are much reduced and they have a longer life. They keep the professional diver safer and more efficient both while diving and on deck. They will ultimately reduce costs for the operator. The highest quality materials, workmanship with competitive pricing and unmatched service to our clients worldwide. SYNERGY invites you to visit our website or contact us directly so that we can assist you with all your Diving Umbilical needs.

## SYNERGY SURFACE DIVING HOSES AND UMBILICALS SY-AQUAFLOW

**SY-UDA0103**

3 part surface demand



**SY-UDA0204**

3 part plus video



**SYNERGY SURFACE DIVING HOSES AND UMBILICALS SY-AQUAFLOW**



**Diving Umbilical with protective outer sheet**



**Diving Umbilical with spiral wrap**



**Diving Umbilical without protective outer sheet**

## OUTLAND VIDEO CAMERA / LIGHTS / UMBILICALS

Mechanical	Specification
Weight	6 oz (.2kg) Dry, 3 oz(.06kg) wet
Depth Rating	2000 ft (600m)
Housing	Black delrin
Electrical	
Image Device	1/3" CCD sensor (412k pixel)
Sensitivity	.001 lux @f1.4
Resolution	600 TV lines standard
Video Out	1.2 Vpp
Power	12 VDC @ 110 ma.
Optical	
Lens	3.6mm, Electronic-Iris
Focus	Fixed 4" to infinity
Angle of View	70 horz. (in water)




**PART NO : SY-UWC-325/p/e**



**PART NO : SY-UWL-401**

Mechanical	Specification
Weight	7oz(0.2kg) Dry, 3 oz.(.1kg) Wet
Depth Rating	2000 ft (600m)
Housing	6061-16 Anodized Aluminium
Electrical	
Power	12 VDC @ 110 ma.
Wattage	18 watt (Eq to 150 watt halogen)
Output	700 lux at 1 meter

Mechanical	Specification
Conductors	16ea #22 awg 1 RG-59 Coax
Length (mtrs)	100/150/200 as per requirement
Diameter	8.5mm (0.35")
Materials	Orange Polyurethane jacket
Breaking Strength	1200 lbs
End fittings	
Diver End	Moulded Y connection
Camera	Rmk-5-fs with locking sleeve
Light	Rmg-3-fs with locking sleeve
Surface end	Soldered connection
Cable	8 pin amphenol connector

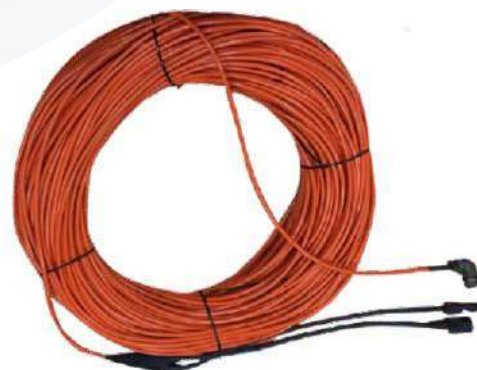

**PART NO : SY-VC-150M**

## SYNERGY PIGTAILS AND CONNECTORS

Connector	SY-RMK-5-FS
Type	5 Female Sockets
Cable	18 in Pigtail of 18 SO AWG Cable
Material	Special Neoprene, Molded
Contacts	Copper Alloy, Hard Gold Plated per ASTM-B-488
Voltage Rating	600 VDC
Pressure Rating, Mated	Up to 20,000 psi
Mates with	SY-XSL-5-BCL on Outland Camera SY-UWC-325/p/e

**PART NO : SY-RMK-5-FS**



**PART NO : SY-RMG-3FS**



Locking sleeve for Rmg-3-fs

**PART NO : SY-G-FLS-D**



Locking sleeve for Rmk-5-fs

**PART NO : SY-K-FLS-D**

Connector	SY-RMG-3-FS
Type	3 Female Sockets
Cable	18 in Pigtail of 18 SO AWG Cable
Material	Special Neoprene, Molded
Contacts	Copper Alloy, Hard Gold Plated per SY-ASTM-B-488
Voltage Rating	600 VDC
Pressure Rating, Mated	Up to 20,000 psi
Mates with	SY-XSG-3-BCL on Outland light SY-UWL-401

**PART NO : SY-MS3108B-18-08P**

<b>Certifications</b>	Provided with each system
International	IMCA D023
Manufacturer	Synergy Certificates
Electrical	Continuity/Function test



**PART NO : SY-CLBRK**



SS camera and light bracket with jubilee clamp

Cannon Right Angle Amphenol Connector is used for connecting the video camera umbilical to the surface video console unit.

## CLASS WITNESS CERTIFICATES

Industry & Facilities Division  
Third Party Inspection Report  
Page 1 of 6

**INSPECTION REPORT No:** TBA / 4.20.242(B-01) **Revision:** No. 0

Initial /  Interim /  Final /  Re-read  
Inspection requested by: M/S Synergy Diving & Equip. Solution, P.O. Dubai, U.A.E.  
Inspection performed at: Requested Authority:  Yes /  No  
BY Job No: TBA / 4.20.242

**Project:** Third Party Inspection Services  
BY Client: M/S. Synergy Diving & Equipment Solution PSC  
DUBAI, UAE  
Manufacturer/Vendor: M/S. Synergy Diving & Equipment Solution PSC  
Sub-Vendor/Supplier: N/A  
Inspection Location: In-Crew, Dubai  
Inspection performed on: 20/06/2019  
(Month / )

**IPD Ref. (if applicable):**  
BY Internal Proj:  No  
BY External:  Refer to BY  
BY Manufacturer:  Refer to Manufacturer  
BY Other:  Refer to Manufacturer  
Non-Inspection/Approval: Not Date:  No  
Non-Approval/Approval: TBA (Date):  No

MATERIAL / SUBJECT OF INSPECTION	ITEM / TAG No	QTY As per PIC	QTY Offered for Inspection
Check on attachment section J issued (Indicate if separate material details provided in attachment)			
Witness of pneumatic over pressure test of Three Diver SRP (High Pressure: 1200/250 BAR & Low Pressure: 120/250 psi)	Serial No. SRP - 120 / TRITON 378	01 No.	01 No.

**A - INSPECTION RESULT**

Satisfactory  
 Satisfactory with comments  
 Not Satisfactory  
(Any of trailing Punch or Non-Conformity items is still open)

Non-Conformity (NCR) raised during the inspection

**Inspection Summary:** (For details refer to section D)

Witness of pneumatic over pressure test of three diver SRP (High Pressure: 1200/250 BAR & Low Pressure: 120/250 psi) issued No. 120/250 TRITON 378, as per Attachment - A, is found satisfactory.

Open Non-Conformities:  Yes, details in section D  No  
Open Punch List Items:  Yes, details in section H  No  
Release Note Issued:  Yes, number(s)  No  
BY Traceability:  Yes  No

GMS/19/INSPEC/En Rev. 3 Copyright Bureau Veritas 10/2019  
This template is intended exclusively when BY is acting as 2<sup>nd</sup> party inspection body. The use of forward template is forbidden in the frame of 2<sup>nd</sup> party services where Client specification and templates must be used.

Industry & Facilities Division  
Third Party Inspection Report  
Page 2 of 6

**INSPECTION REPORT No:** TBA / 4.20.242(B-01) **Revision:** No. 0

**BY Inspector:** Mohammed Sarraf (Name and Signature)  
**BY Coordinator:** Shih Le (Name and Signature)  
Inspection Report Date: 20/06/2019  
Client Business:  CLIENT /  MANUFACTURER /  OTHER  
Attachment Report:  Yes, details in section J  No

**B - REFERENCE DOCUMENTATION:** (Refer to attachment section J if issued) (Indicate if separate equipment details provided in attachment)

Title	Reference #	Rev.	Approved status	Approved by	Date
Diving Equipment System Preparation, assembly	IMCA D040	01	Approved	Shih Le	12/01/2018
Pneumatic Over Pressure Test	SEI/QMS/M 01	02	Approved	Sarraf	Mar. 2018

**C - ATTENDEES**

Name	Position	Representing
M. Mohammed Sarraf	Lifting Inspector	BY
M. Asad Siddiqui	QC Engineer	Supplier

**D - MEASURING & TESTING EQUIPMENT USED** (Indicate if separate equipment details provided in attachment)

Equipment Type	Equipment Identity #	Last Calibration Date	Expiry Date
Digital Pressure Gauge	AC-2740206	27-07-2019	25-09-2021
Portable Pneumatic Tester	65342	20-11-2019	20-11-2020

**E - INSPECTION DETAILS**

**E1 - Details of Witness (W) & Hold (H) Inspection Points**

GMS/19/INSPEC/En Rev. 3 Copyright Bureau Veritas 10/2019  
This template is intended exclusively when BY is acting as 2<sup>nd</sup> party inspection body. The use of forward template is forbidden in the frame of 2<sup>nd</sup> party services where Client specification and templates must be used.

Industry & Facilities Division  
Third Party Inspection Report  
Page 3 of 6

**INSPECTION REPORT No:** TBA / 4.20.242(B-01) **Revision:** No. 0

**Manufacturing Progress Status:**  
• Nil

**Details of Inspection Activities carried out with reference to ITP:**  
• Visual inspection of Three diver SRP is found satisfactory  
• Verified the serial No. SRP-120 / TRITON 378 of three diver SRP  
• Witnessed pneumatic over pressure of three diver SRP as per Attachment - A & found satisfactory in the line of inspection

**Confirmation of certificates:**  
• Verify calibration certificates of measuring instruments and found satisfactory

**E2 - Details of Monitoring and Surveillance Points:**  Test is conducted during the test  Test is conducted during the test

**E3 - Details of Certificate Review:**  Test is conducted during the test  Test is conducted during the test

**F - HEALTH, SAFETY & ENVIRONMENT COMMENTS**  
(Comment on Observations and Actions Taken During the Inspection)  
Corrected 2 minor safety related issues. Safety Concerns were found at the time of inspection.

**G - NON CONFORMITIES** (Refer to attachment section J if issued) (Indicate if separate details are provided in attachment)

Item	Description	Status	Raised on	Report No.	Closed on	Report No.	Comments
N/A							

**H - PUNCH LIST ITEMS** (Refer to attachment section J if issued) (Indicate if separate details are provided in attachment)

Item	Description	Status	Raised on	Report No.	Closed on	Report No.	Comments
N/A							

GMS/19/INSPEC/En Rev. 3 Copyright Bureau Veritas 10/2019  
This template is intended exclusively when BY is acting as 2<sup>nd</sup> party inspection body. The use of forward template is forbidden in the frame of 2<sup>nd</sup> party services where Client specification and templates must be used.

Industry & Facilities Division  
Third Party Inspection Report  
Page 4 of 6

**INSPECTION REPORT No:** TBA / 4.20.242(B-01) **Revision:** No. 0

**DIGITAL PICTURES**

**Observation:** Front View of the SRP

**Observation:** Rear View of the SRP

**Observation:** Front View of the SRP

**Observation:** Front View of the SRP

GMS/19/INSPEC/En Rev. 3 Copyright Bureau Veritas 10/2019  
This template is intended exclusively when BY is acting as 2<sup>nd</sup> party inspection body. The use of forward template is forbidden in the frame of 2<sup>nd</sup> party services where Client specification and templates must be used.

Industry & Facilities Division  
Third Party Inspection Report  
Page 5 of 6

**INSPECTION REPORT No:** TBA / 4.20.242(B-01) **Revision:** No. 0

**ATTACHMENTS**

Item	Attachment Name	Total Pages	Description
1	Spotting the hazard	1	3 HRS SAFETY CHECK LIST

GMS/19/INSPEC/En Rev. 3 Copyright Bureau Veritas 10/2019  
This template is intended exclusively when BY is acting as 2<sup>nd</sup> party inspection body. The use of forward template is forbidden in the frame of 2<sup>nd</sup> party services where Client specification and templates must be used.

Industry & Facilities Division  
Third Party Inspection Report  
Page 6 of 6

**INSPECTION REPORT No:** TBA / 4.20.242(B-01) **Revision:** No. 0

**Inspection Details:**

**Witnessed Pneumatic over pressure test of Three Diver SRP with the following details:**

Description	Three Diver SRP
Country of origin	U.A.E.
Manufacturer Serial No.	SRP - 120 / TRITON 378
Year of Manufacture	~ Aug. 2019
Design pressure	1.2 MPa / 120 bar
Test pressure	1.2 MPa / 120 bar
Pneumatic Test Date	20.06.2019

**Pneumatic Test:**

- Pneumatic over pressure test of three diver SRP (Serial No. SRP - 120 / TRITON 378) has been witnessed as per the approved procedure and found the following:
  - Test Pressure gauge calibration certificate was reviewed and found satisfactory
  - Low Pressure of 120 psi (1.2 MPa) was applied under low pressure piping of Three diver SRP for 20 minutes, no leaks found, satisfactory at time of inspection.
  - High Pressure of 1200 psi (12 MPa) was applied to the high pressure piping of Three diver SRP for 20 minutes, no leaks found, satisfactory at time of inspection.
  - No-pneumatic test was performed on piping, fittings & valves, no leakage found at the time of inspection. Results satisfactory.

**END OF REPORT**

GMS/19/INSPEC/En Rev. 3 Copyright Bureau Veritas 10/2019  
This template is intended exclusively when BY is acting as 2<sup>nd</sup> party inspection body. The use of forward template is forbidden in the frame of 2<sup>nd</sup> party services where Client specification and templates must be used.

Certifications	Provided with each panel
Manufacturer International	Synergy certification
Class	IMCA D040
Warranty	Bureau Veritas pressure test certificates
Weight	1 year international manufacturer warranty
Weight	Frame only : 160 kgs
Weight	Frame with cylinders, panel, umbilicals and bandmasks : 600 kgs



## THREE DIVER SCUBA REPLACEMENT PACKAGE (SRP) WITH STEEL CYLINDERS

# SY-3DAP-D040-SC-SRP-X-XXX

### ORDERING INFORMATION

Sr.	Part Number	Description
1	SY-3DAP-D040-SC-SRPX-XXX	Three diver scuba replacement panel with ss frame, emergency panel, 6 x 50 ltr x 200 bar breathing air steel cylinders, all plumbing with fittings , valves, hoses to connect from cylinders to diving panel (diving panel not included, please choose from panel options below)


Sr.	Part Number	Description
1	SY-3DAP-D040-SF	Portable three diver panel, offshore, imca (no radio, no diver cctv), side inlet and outlet fittings
2	SY-3DAP-D040-BF	Portable three diver panel, offshore, imca (no radio, no diver cctv), back inlet and outlet fittings
3	SY-3DAP-D040-R-SF	Portable three diver panel, offshore, imca with radio (no diver cctv), side inlet and outlet fittings
4	SY-3DAP-D040-R-BF	Portable three diver panel, offshore, imca with radio (no diver cctv), back inlet and outlet fittings
5	SY-3DAP-D040-R-1DV-SF	Portable three diver panel , offshore, imca with radio and diver 1 cctv, side inlet and outlet fittings
6	SY-3DAP-D040-R-1DV-BF	Portable three diver panel , offshore, imca with radio and diver 1 cctv, back inlet and outlet fittings
7	SY-3DAP-D040-R-2DV-SF	Portable three diver panel, offshore, imca with radio and diver 1 and diver 2 cctv, side inlet and outlet fittings
8	SY-3DAP-D040-R-2DV-BF	Portable three diver panel, offshore, imca with radio and diver 1 and diver 2 cctv, back inlet and outlet fittings

Sr.	Part Number	Description
1	SY-2830A-11	Amcom iii three-diver rechargeable basic portable communicator
2	SY-UDA-0204	4 core Umbilical air/gas, pneumo, communication and video cables
3	SY-UDA-0103	3 core Umbilical air/gas, pneumo, communication
4	SY-ORANGESHEATH	Full braided protective outer sheath (for complete protection of umbilicals)
5	SY-SPIRAL WRAP	Spiral wrap (in 10 mtr lengths) (for umbilical protection)
	<b>Fittings as below</b>	
6	SY-386-PB-AIR	3/8"x 6 jic phosphor bronze reusable umbilical air/gas hose end fitting
7	SY-144-PB-PNEUMO	1/4" x 4 jic phosphor bronze reusable umbilical pneumo end fitting
8	SY-RMG-3-FS	Marsh marine, 3 pin, Female, 18"
9	SY-BANPLUGS-TWIN	Twin banana plugs surface communication end fitting (Red/Black)
10	SY-RMK-5-FS	Marsh marine, 5 pin, female, 18"
11	SY-K-FLS-D	Locking sleeve, delrin , for RMK-5-FS
12	SY-RMG-3-FS	Marsh marine, 3 pin, female, 18"
13	SY-G-FLS-D	Locking sleeve, delrin, for RMG-3-FS
14	SY- MS3108B-18-08P	Cannon right angle amphenol connector is used for connecting the Surface end of the video camera umbilical to the surface video console unit




### BESPOKE DESIGNS – ANY CONFIGURATION AS PER CLIENT REQUIREMENT

**THREE DIVER SCUBA REPLACEMENT PACKAGE (SRP) WITH STEEL CYLINDERS**  
**# SY-3DAP-D040-SC-SRP-X-XXX**

# Contact us

 29th Street, Amman Road, Behind Al Huraiz Est. For Industry,  
Al Qusais, Industrial Area – 1,  
Dubai, United Arab Emirates

-  Tel : 009714 2580533 
-  Fax : 042516664 
-  UAE : 00971505648178 
-  UK : 00447951966260 

-  Website : [www.synergiequipment.com](http://www.synergiequipment.com)
-  Email : [ram@synergiequipment.com](mailto:ram@synergiequipment.com)
-  For Sale : [info@synergiequipment.com](mailto:info@synergiequipment.com)

